



Contemporary Styled Wood Heaters



New Season Catalogue





Blaze slow combustion wood heaters are designed to be interactive with your living space, simple in operation and stylish in looks.

Providing excellent convection heat coverage, the Blaze range meets the current emission and efficiency requirements as set by the Australian Standards. Our heaters are built to provide year after year warmth and come with a 10 Year Warranty. Backed by over 30 years of industry knowledge and expertise by Pecan Engineering, we are proud of our Australian designed Blaze range.



B100

Freestanding Radiant Wood Heater with approved wood storage

The Blaze 100 is small in foot print but a powerful radiant wood heater with a minimalistic design and easy to use features. Modern stainless steel handle cast iron door, ceramic door glass and constructed with 6mm steel. The B100 is just quirky enough to be uniquely stylish.

	Coverage	Emissions	Efficiency
B100	120-160m ²	0.96g/kg	83% Peak (ave 75%)


FEATURES

- 6mm Steel Baffle
- Stainless Steel Handle
- Cast Iron Door
- Ceramic Glass
- Firebrick lining
- 6mm Firebox construction
- Weight 115kg

CLEARANCES

	FLUE SHIELD	Side	Rear	Front	Corner
B100	900mm Rear Flue Shield	700	200	300	400
	Decromesh with 490mm Inner Reflector	600	225	300	400

900mm wide hearth dimensions are the minimum only and may need to be extended to reach the wall behind the heater. Fibre cement thickness 7.5mm, toughened glass thickness 10mm

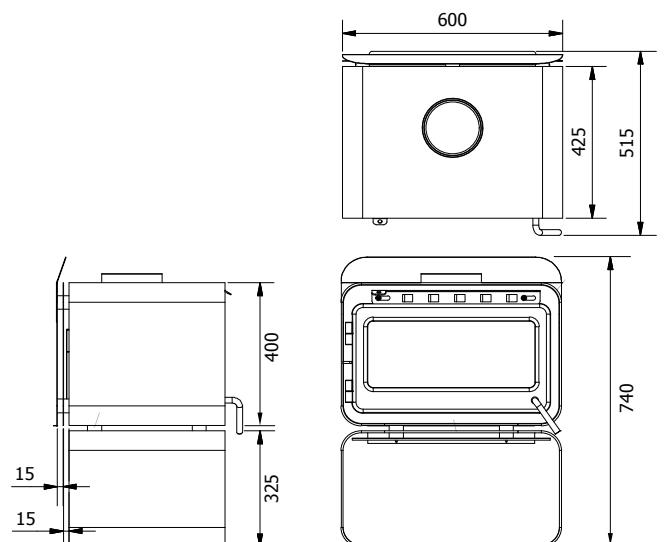

All dimensions contained within this document are in millimeters unless otherwise specified. In the interest of product development Pecan Engineering Pty Limited reserve the right to change the specifications without prior notice of the Blaze range of products.



B510 & B810

Insert Convection Wood Heater with 2 speed Manual Control Fan

The Blaze 510 and 810 Insert range have been designed to be installed into a full masonry cavity or with an optional zero clearance box. Easy to use features make the Blaze Insert models a great addition to any living space. 6mm steel construction, stainless steel handles, ceramic glass and firebrick lining of the firebox.

	Coverage	Emissions	Efficiency
B510	140-180m ²	0.91g/kg	67% Peak (ave 59%)
B810	200-260m ²	1.22g/kg	72% Peak (ave 63%)


FEATURES

8mm Steel Baffle
Stainless Steel Handle
Large Steel Door
Ceramic Glass
Firebrick lining

6mm Firebox construction
Weight 121kg (B510) 153kg (B810)
Zero Clearance Box (optional)




The dimensions given in the installation diagram are the minimum required for the floor protector. It may be desirable, eg for aesthetic reasons for the floor protector to be larger than these minimum dimensions. The floor protector shall be constructed of 22.5mm minimum thick fibre cement sheet. It may be laid directly on the combustible floor.

For more details and variations on floor protectors refer to AS/NZS 2918:2001 Clause 2.2, 3.3.1 and 3.3.2

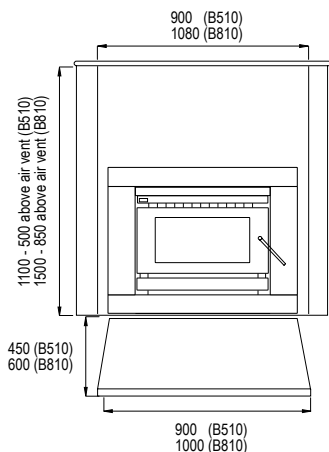

Installation of B510 and B810

The dimensions in the diagram above represent the minimum clearance to combustible materials, ie mantle-piece, when installed in a non-combustible mantle-piece refer to AS/NZS 2918 Clause 3.4.2

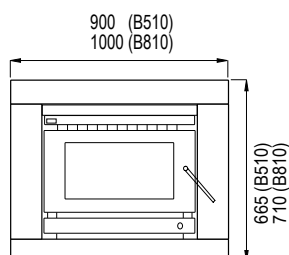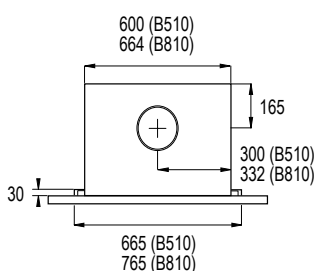



blaze



B800 Freestanding model

B500 & B800

Freestanding Convection Wood Heater with 3 speed Manual Control Fan

The Blaze 500 & 800 Range, designed in Australia has excellent efficiency with amazing coverage. 6mm Steel construction, large firebox and easy to use features.

FEATURES

8mm Steel Baffle
Stainless Steel Handle
Large Steel Door
Ceramic Glass
Firebrick lining
6mm Firebox construction
Weight 131kg (B500) 167kg (B800)


	Coverage	Emissions	Efficiency
B500	160-190m ²	0.71g/kg	73% Peak (ave 60%)
B800	220-260m ²	0.88g/kg	73% Peak (ave 67%)

CLEARANCES

	FLUE SHIELD	Side	Rear	Front	Corner
B500	Decromesh with 490mm Inner Reflector	350	125	300	100
B800	Decromesh with 490mm Inner Reflector	425	175	400	150

900mm wide hearth dimensions are the minimum only and may need to be extended to reach the wall behind the heater. Fibre cement sheet thickness 15mm.

All dimensions contained within this document are in millimeters unless otherwise specified. In the interest of product development Pecan Engineering Pty Limited reserve the right to change the specifications without prior notice of the Blaze range of products.

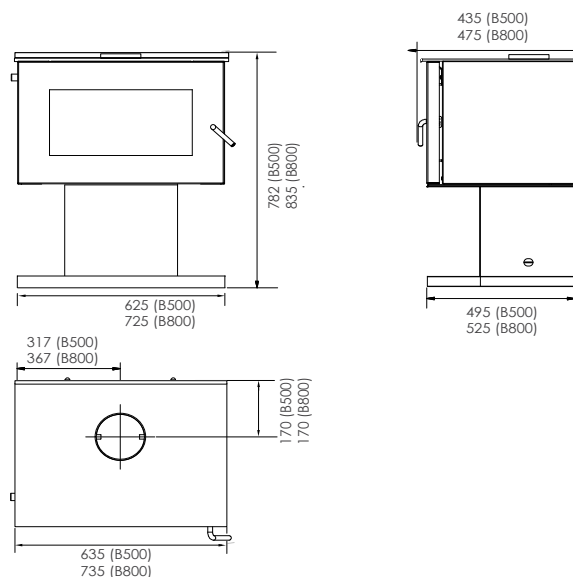



B600 Model, centre mount (SC)

B605 & B905

Bench mounted Convection Wood Heater with 3 speed Remote Control Fan

FEATURES

6mm Steel Baffle
Stainless Steel Handle
Large Steel Door
Ceramic Glass
Firebrick lining
6mm Firebox construction
Weight 198kg (B905) 153kg (B605)

The 605/905 Range not only looks modern and contemporary but it has excellent efficiency with amazing coverage. Offering a standard 3 speed remote fan control and 6mm toughened glass table top the Blaze 605/905 is designed to enhance any living space.

	Coverage	Emissions	Efficiency
B605	150-190m ²	0.67g/kg	87% Peak (ave 70%)
B905	200-260m ²	0.74g/kg	84% Peak (ave 72%)




Configurations available

	FLUE SHIELD	SC	SR	SL	R	C	F
B605	900mm Rear Flue Shield	425	505	425	150	150	300
	Decromesh with 490mm Inner Reflector	425	505	425	225	150	300
B905	900mm Rear Flue Shield	375	560	375	175	150	300
	Decromesh with 490mm Inner Reflector	375	560	375	225	150	300

SC= Firebox centre mounted | SR = Firebox right side mounted | SL = Firebox left side mounted
R = Rear clearance | C = Corner clearance | F = Front of door opening to hearth.
Measurements are referenced to the left hand side of the firebox.

1000mm wide hearth dimensions are the minimum only and may need to be extended to reach the wall behind the heater. Fibre cement sheet thickness 7.5mm, toughened glass thickness 10mm.

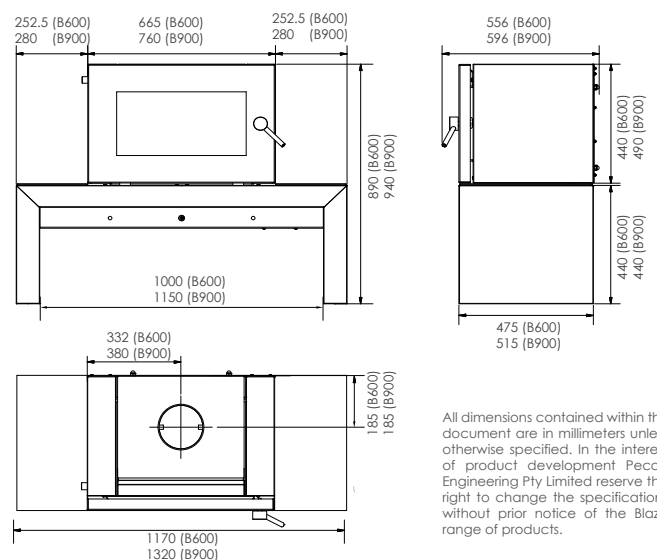

All dimensions contained within this document are in millimeters unless otherwise specified. In the interest of product development Pecan Engineering Pty Limited reserve the right to change the specifications without prior notice of the Blaze range of products.



B600 & B900



Free Standing Convection Wood Heater
with Remote Control 3 speed Fan

The 600 & 900 Range not only looks modern and contemporary but it has excellent efficiency with amazing coverage. Offering a standard 3 speed remote fan control and 6mm toughened glass wood stack base. 6mm steel construction with a large internal firebox. The easy to use functions make the 600 & 900 models an all-round winner.


	Coverage	Emissions	Efficiency
B600	150-190m ²	0.67g/kg	87% Peak (ave 70%)
B900	200-260m ²	0.88g/kg	84% Peak (ave 72%)

FEATURES

- 6mm Steel Baffle
- Stainless Steel Handle
- Large Steel Door
- Ceramic Glass
- Firebrick lining
- 6mm Firebox construction
- Weight 190kg (B900) 155kg (B600)

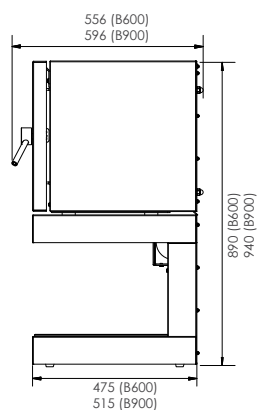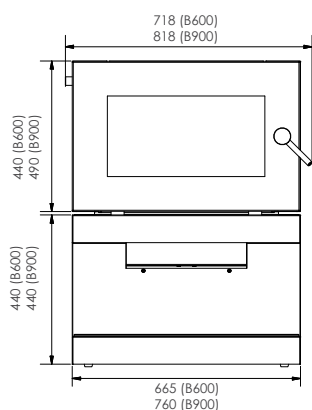

3 Speed Fan
Remote is standard
with all 600 & 900
models



Floor Protector

900mm wide hearth dimensions are the minimum only and may need to be extended to reach the wall behind the heater. Fibre cement sheet thickness 7.5mm, toughened glass thickness 10mm


	FLUE SHIELD	Side	Rear	Front	Corner
B600	900mm Rear Flue Shield	425	150	300	150
	Decromesh with 490mm Inner Reflector	425	225	300	150
B900	900mm Rear Flue Shield	375	175	300	150
	Decromesh with 490mm Inner Reflector	375	225	300	150

All dimensions contained within this document are in millimeters unless otherwise specified. In the interest of product development Pecan Engineering Pty Limited reserve the right to change the specifications without prior notice of the Blaze range of products.

blazefireplaces.com.au



Authorised appointed Dealer

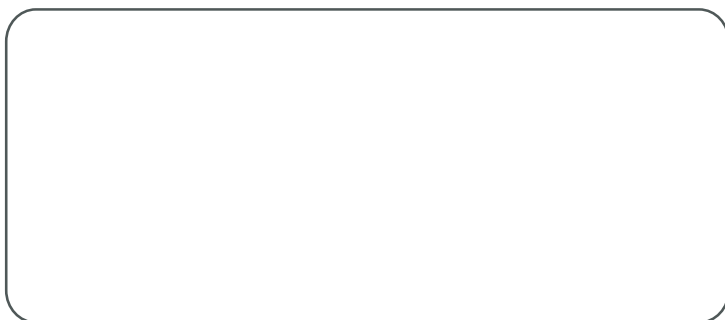

Australian designed by Pecan Engineering Pty Limited
13 Acorn Road, Dry Creek SA 5094
T+61 8 8349 8332 | F +61 8 8260 6643
E info@pecan-eng.com.au



Pecan Engineering Pty Limited
provide a 10 Year Firebox Warranty
for all Blaze models.



Blaze models meet or exceed the
emissions standards AS/NZS 4012 & 4013



Pecan Engineering Pty Limited proudly supports the activities
of Landcare Australia through its membership of the AHHA.